

Model G3AD – G3 to M-VIEW® Touch Adapter Panels


The model G3AD adapter panels provide the necessary hardware to install an M-VIEW® Touch into an existing cutout where a G3 unit once resided. These panels are coated with a durable silver finish that match the powder coat used on the M-VIEW Touch series HMI. Also included in the kit are the necessary KEPS nuts and panel gasket required to meet any NEMA 4X/IP66 (face only) application.

Mounting Procedure


1. Remove existing G3 HMI from panel.
2. Install new G3 to M-VIEW Touch adapter panel into existing G3 cutout using the supplied panel gasket.
3. Install new KEPS nuts (supplied) onto new panel and tighten evenly for uniform gasket compression.

Note: Tightening the KEPS nuts beyond a maximum of 17 inch-pounds (1.92 N-m) may cause damage to the front panel.

4. Install new M-VIEW Touch into adapter panel using the mounting clips supplied and tighten to 6.0 pound-force inch (96 ounce-force inch) evenly for uniform gasket compression.

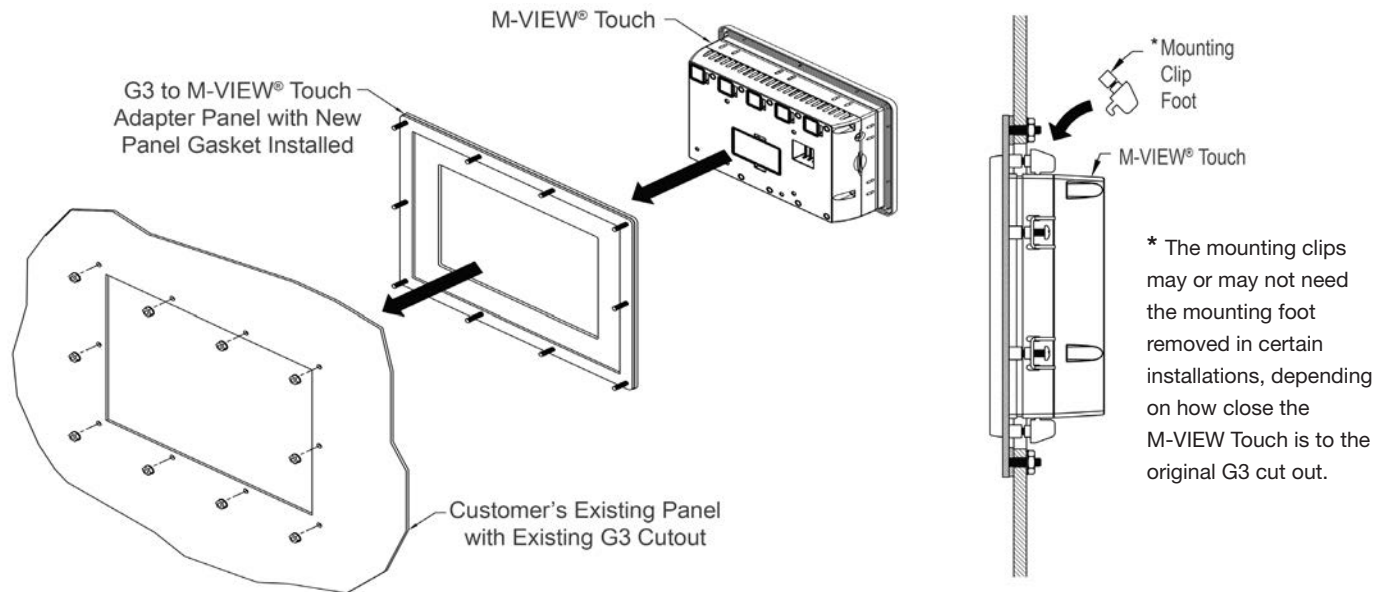

Adapter Panel Dimensions

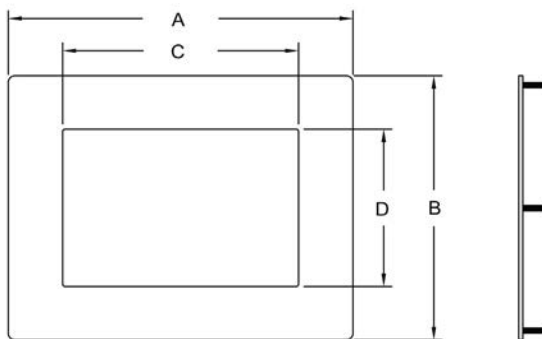

Existing G3 Unit	Replacement M-VIEW Touch	A	B	C	D
G306A	MV-7T	8.83	7.08	7.06	4.89
G310S	MV-10T	12.83	9.50	10.197	7.931
G310S	MV-12T	12.83	9.50	11.458	7.561

Ordering Information

Model NO	Description	Part Number
G3AD	G306A to M-VIEW Touch 7 Cutout Adapter	00034621
	G310S to M-VIEW Touch 10 Cutout Adapter	00034620
	G310S to M-VIEW Touch 12 Cutout Adapter	00034622