

Maintain Lube Level

Model LR857


FW Murphy LR857 Lube Level Regulator maintains the crankcase oil level of an engine, pump or compressor. Adjusted to the correct running oil level, the LR857 will replenish oil as it is used. An integral, low-level switch will alarm and/or shut down the equipment, if supply oil is lost and the equipment continues to use oil.

The LR857 maintains oil level on any size engine but is recommended for small- to medium-volume applications and installations that require a three-wire, snap-action switch.

As crankcase oil level drops, the LR857 float also drops and opens the Thumb-Valve™. This allows oil to flow from the supply tank through the LR857 and into the crankcase. When proper level is attained in the crankcase, the LR857 float rises causing the Thumb-Valve to close off further oil flow.


The simple and unique Thumb-Valve is non-clogging and provides a positive, leak-free seal. Flow rate through the 1/8 inch (3 mm) orifice is significant to allow crankcase refill through the LR857.

Thumb-Valve Operation

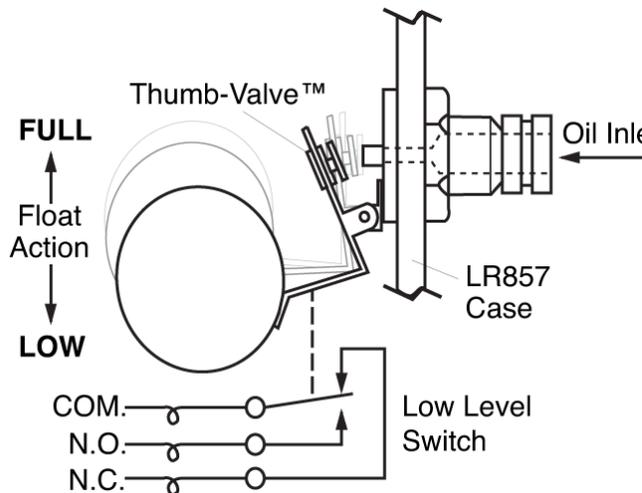

* Products covered by this bulletin comply with EMC Council directive 89/336/EMC regarding electromagnetic compatibility except as noted.

Dimensions

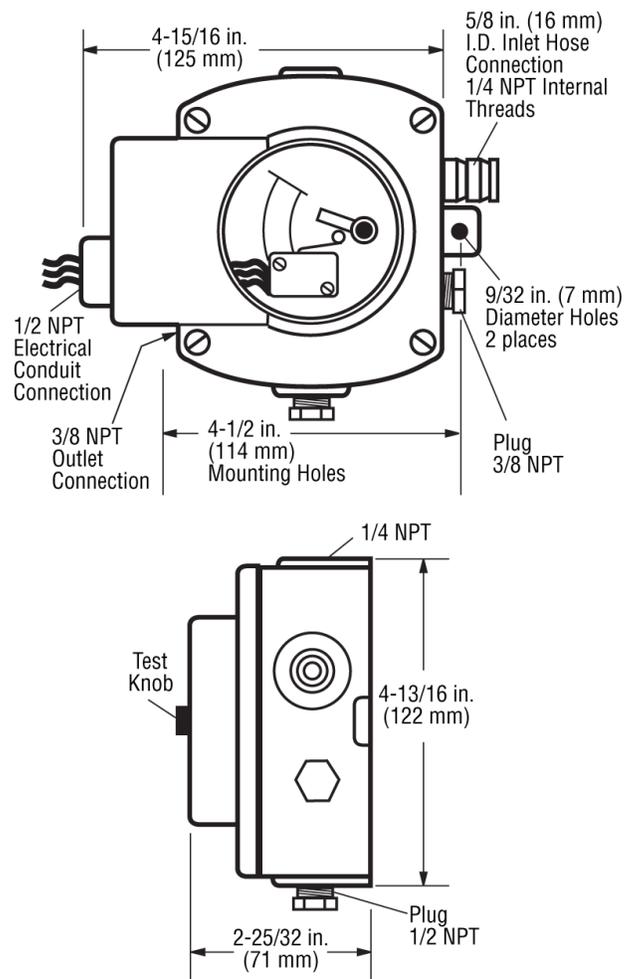

Mounting Brackets with Hardware


FW Murphy offers two mounting brackets for the LR857. The 15000238 Pipe Bracket Kit fits a 7/8 in. (22 mm) diameter pipe (see typical installation). The 15010224 universal Flange Kit allows various mounting methods.

15010224

Universal Flange Kit

Additional Hardware Supplied

- (2) 1/4-20 x 1-1/4 inch (32 mm) bolts
- (4) 1/4 dia. flat washer
- (2) 1/4-20 hex nuts
- (2) 5/16-18 x 1-1/4 inch (32 mm) bolts
- (4) 5/16 dia. flat washer
- (2) 5/16-18 hex nuts

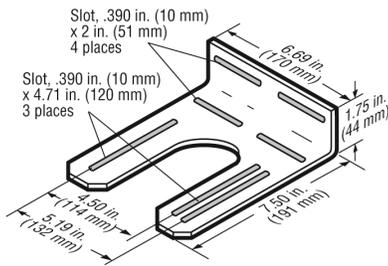


15000238


Pipe Bracket Kit

Additional Hardware Supplied

- (2) 1/4-20 x 7/8 inch (22 mm) screws
- (2) 1/4-20 x 1 inch (25 mm) screws
- (4) 1/4-20 hex nuts
- (4) 1/4 inch (6 mm) dia. split washer

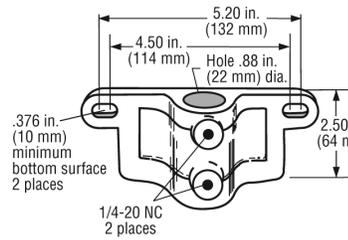

LR857 Typical Installation

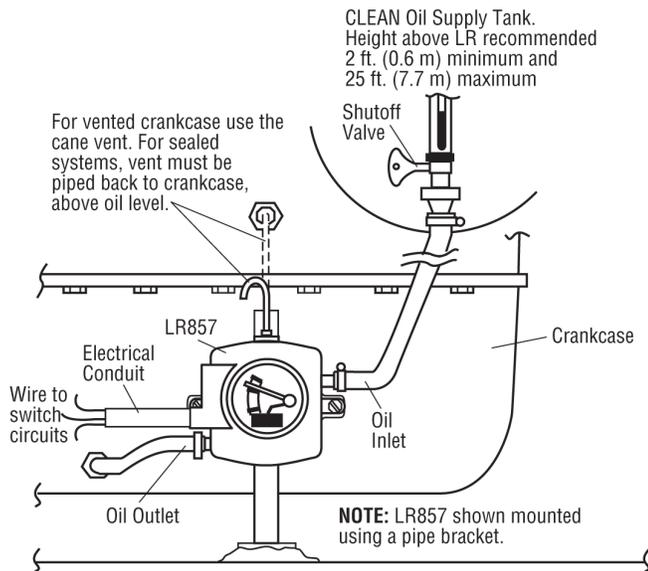

LR857 Shipping Dimensions:

9 x 5-1/2 x 6 in. (229 x 140 x 152 mm)

LR857 Shipping Weight:

3 lbs. 6 oz. (1.5 kg)

Specifications

Inlet Connection: 5/8 in. (16 mm) I.D. hose

Outlet Connection: 3/8 NPT

Snap-switch: SPDT rating 10 A @ 125 VAC; 0.5 A @ 125 VDC; 10 A @ 30 VDC


Conduit Connection: 1/2 NPT

Case: Die cast aluminum

Lens: Polycarbonate

Float: Brass

Flow Rates (see chart below): Oil with 0.9 specific gravity @ 70°F (21°C)

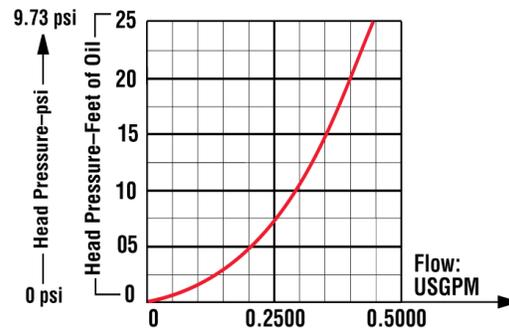

Fittings Kit: 15000420

The 15000420 kit is sold separately. It includes the following items:

Quantity	Description
1	1/4 in. (6 mm) O.D copper cane tube (vent connection)
1	1/4 in. (6 mm) tube x 1/4 male pipe fitting
1	1/2 in. (13 mm) I.D. hose fitting (outlet connection)

How to Order

Part Number	Model and Description	Notes
Specify Model No.	LR857	
15000420	Fittings Kit	Accessories
15000238	Pipe Bracket Kit	
15010224	Universal Flange Kit	
15000159	Inlet Valve Assembly	Replacement Parts
15000100	Glass and Switch Assembly	
15000161	Lid Assembly	
15000941	Float Assembly (Brass-std)	